



**Pre-normative REsearch for Safe use of Liquid Hydrogen  
(PRESLHY)**

Project Deliverable

# **LH<sub>2</sub> Installation Description**

Deliverable Number:	14 (D2.3)
Work Package :	2
Authors:	Simon Jallais and Laurence Bernard, AL
Submitted Date:	30 November 2018
Due Date:	30 June 2018
Report Classification:	Public



**FUEL CELLS AND HYDROGEN**  
JOINT UNDERTAKING



This project has received funding from the Fuel Cells and Hydrogen 2 Joint Undertaking under the European Union's Horizon 2020 research and innovation programme under grant agreement No 779613.

<b>Approvals</b>			
	Name	Organisation	Date
WP Leader	Simon Jallais	Air Liquide	30 April 2018
	Alexandros Venetsanos	NCSR	August 2018
	Laurence Bernard	Air Liquide	November 2019
Revision for V1.1	Thomas Jordan	KIT	January 2020

## Acknowledgments

This project has received funding from the Fuel Cells and Hydrogen 2 Joint Undertaking under the European Union's Horizon 2020 research and innovation programme under grant agreement No 779613.

## Disclaimer

Despite the care that was taken while preparing this document the following disclaimer applies: The information in this document is provided as is and no guarantee or warranty is given that the information is fit for any particular purpose. The user thereof employs the information at his/her sole risk and liability.

The document reflects only the authors views. The FCH 2 JU and the European Union are not liable for any use that may be made of the information contained therein.

## Key words

Liquid Hydrogen, Cryogenic tanks, Trailers, Trucks, Fueling stations, vaporizers, pumps, buffers, dispenser, refueling stations.

## Abbreviations

CCS	Carbon Capture and Storage
CO <sub>2</sub>	Carbon Dioxide
FCV	Fuel Cell Vehicle
LH <sub>2</sub>	Liquid Hydrogen
MLI	Multi-layer insulation
NPSH	Net Positive Suction Head
SMR	Steam Methane Reformer

## Table of contents

<b>Introduction</b>	<b>3</b>
<b>1 Liquid hydrogen delivery infrastructure</b>	<b>3</b>
<b>2 Liquefaction plants</b>	<b>4</b>
<b>2.2 Liquid Hydrogen Trailers</b>	<b>7</b>
<b>4. LH<sub>2</sub>-based fueling station</b>	<b>9</b>
<b>4. Conclusions</b>	<b>12</b>

## Introduction

Hydrogen is a versatile energy carrier with favourable characteristics since it does not release any CO<sub>2</sub> at the point of use as a clean fuel or energy source, and can play an important role in the transition to a clean, low-carbon, energy system.

Hydrogen technologies and products have significantly progressed over past years and are now being introduced to the market.

To follow the increasing demand of hydrogen for FCV, the use of liquid hydrogen (LH<sub>2</sub>) improving the global logistic of hydrogen is a credible option.

This report describes the liquid hydrogen installations of the whole logistic chain from the liquefaction to the use in a fueling station.

## 1 Liquid hydrogen delivery infrastructure

The foreseen liquid delivery infrastructure is as follows (figure 1) :

- A centralized hydrogen production via large electrolysis (more than 100 MW, Proton Exchange Membrane, Alkaline or High Temperature Electrolysis) using renewable electricity or Steam Methane Reformer (SMR) with CCS (Carbon Capture and Storage). Other alternative pathways of production are also under development : electro-photocatalysis, water splitting, fermentation ...;
- A large liquefaction plant;
- Large cryogenic storages at liquefier site;
- Logistics via tanker trucks;
- Small LH<sub>2</sub> storage at fueling station site.

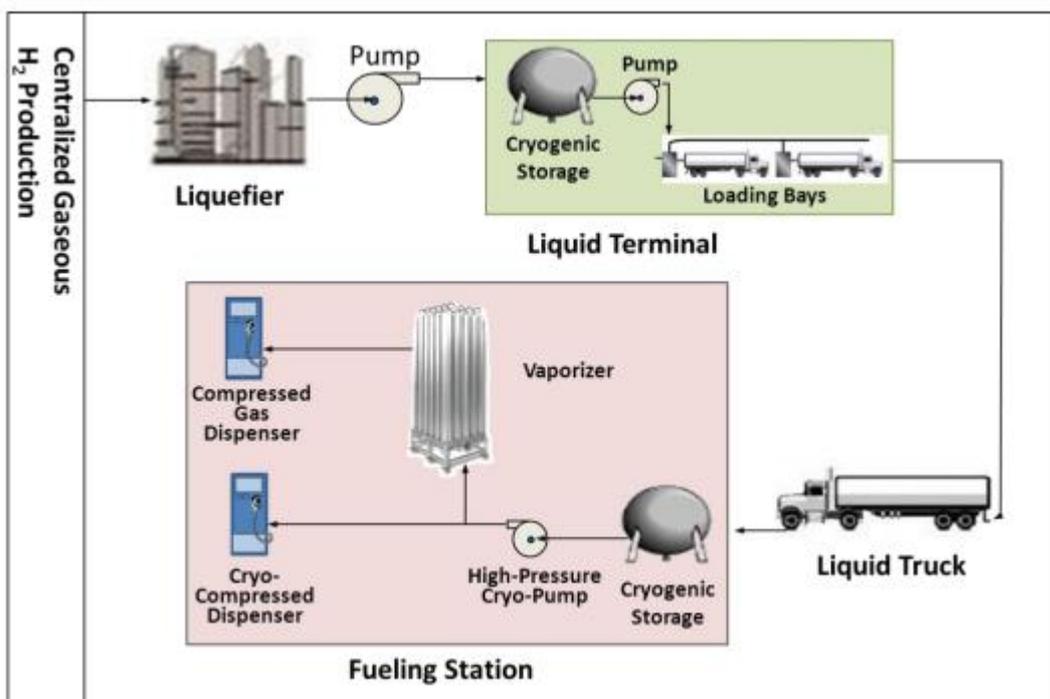


Figure 1: Liquid Hydrogen delivery infrastructure (the pumps between liquefier and storage and between storage and trailers are optional).

## 2 Liquefaction plants

One of the challenges in building a hydrogen economy is the establishment of an efficient production and supply infrastructure. Large scale distribution favors the relatively dense liquid phase LH<sub>2</sub>, but liquefaction still suffers from low energy efficiencies. Historically, LH<sub>2</sub> was mainly used as a rocket fuel, where the low efficiency in the production did not matter. A major program of hydrogen liquefaction was started in the USA within the Apollo space project leading to the design and construction of large-scale liquefaction plants.

The liquefaction of H<sub>2</sub> is a highly energy intensive process. The minimum work required for the liquefaction of hydrogen (at ortho-para equilibrium) is 3.92 kWh of electricity /kg of H<sub>2</sub> or 0.12 kWh /kWh of H<sub>2</sub>. Typical values for the whole process, however, are in the range of 8 - 14 kWh/kg for relatively large liquefaction units. Reducing the energy consumption of liquefiers is an active subject of development for the LH<sub>2</sub> industry (see IDEALHy FCH JU project for instance).

Most plants (11) are located in North America. In Europe, plants (3) in France, Netherlands, and Germany are operated with a total capacity of 19 t/d. The largest plant size is currently 68 t/d (New Orleans, USA). The latest (2017) start-up liquefier (10 t/d) is owned by Airgas (now Air Liquide) in Calvert City.

It has to be noticed that LH<sub>2</sub> liquefiers are outside of the scope of the PRESLHY project.

## 3. Stationary LH<sub>2</sub> large storages

Cryogenic vessels have been commonly used for more than 40 years for the storage and transportation of liquid hydrogen.

In order to manage storage at -253°C, for large storage (> 100 m<sup>3</sup> water volume) double-walled vacuum insulated pressure tanks are used (figure 2). Such vessels consist of an inner pressure vessel, an external protective jacket and compressed perlite under vacuum in the space between the inner vessel and the outer jacket. Perlite is an inorganic amorphous volcanic glass that represents a good tradeoff between cost and insulation properties.

For smaller storages (< 100 m<sup>3</sup>), single-walled pressure tank with multi-layer insulation coating are used (so-called MLI). This technology is described in details in paragraph 2.2 on liquid hydrogen trailers.

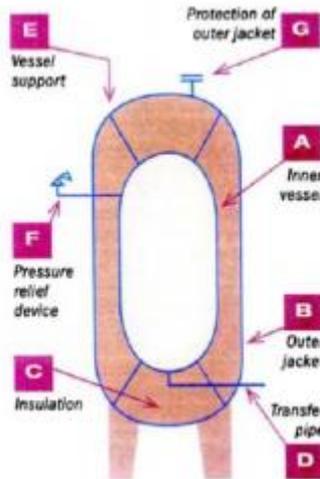


Figure 2: Principal schematic of a double jacket LH<sub>2</sub> tank.

The world's largest LH<sub>2</sub> tank is located at the NASA Kennedy Space Center in Florida (figure 3). The tank is a 3800 m<sup>3</sup> (3218 m<sup>3</sup> of LH<sub>2</sub>) double-wall vacuum perlite (1.3 m of thickness) insulated spherical (in/ex diameter = 18.75 / 21.34 m) storage vessel. The tank is operated at a pressure of 6.2 bar and has a boil-off rate of 0.025%/d.

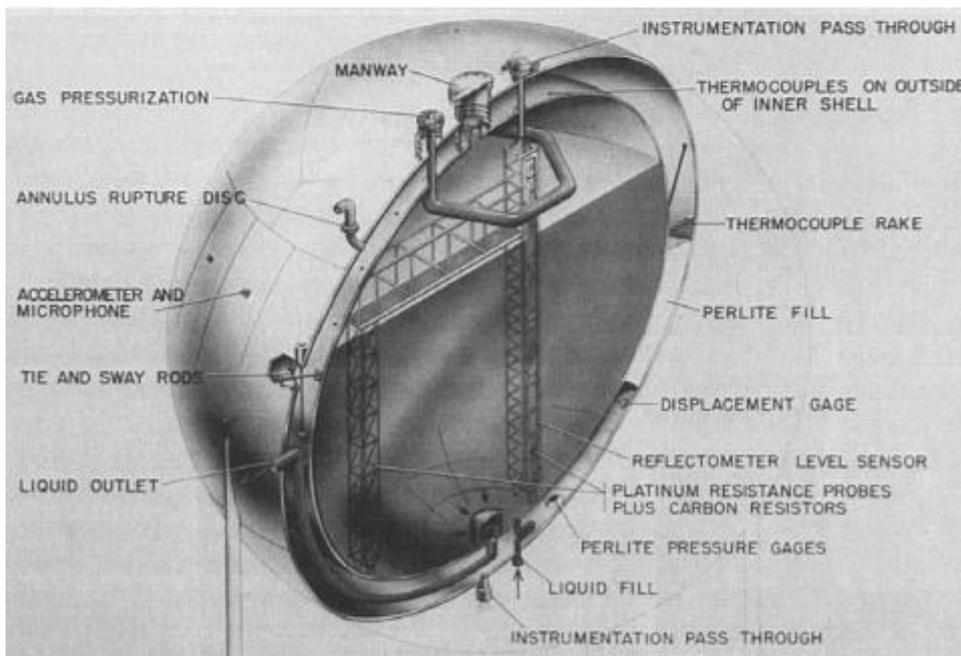


Figure 3: Schematic of the 3218 m<sup>3</sup> LH<sub>2</sub> tank at Kennedy Space Center.

The largest tanks are of spherical shape but large scale LH<sub>2</sub> tanks at the production site are typically horizontal and have a capacity of more than 100 t (1 400 m<sup>3</sup>). For instance, at the Kourou Ariane launch site in French Guiana, Air Liquide operates 5 semi-mobile tanks of 320 m<sup>3</sup> each (3.9 bar) and 1 tank of 110 m<sup>3</sup> (11 bar) (figure 4). The total capacity is 22 t. On the Kourou site there is also a 2.5 t/d liquefaction plant.



*Figure 4: LH<sub>2</sub> storages at Kourou - French Guiana.*

In Waziers in France (Liquefaction unit = 10 t/d), AL operates 4 horizontal tanks of 250 m<sup>3</sup> each (internal/external diameter = 4.02 / 5.1 m - perlite thickness = 500 mm) (figure 5).



*Figure 5: LH<sub>2</sub> storages at Waziers - France.*

## 2.2 Liquid Hydrogen Trailers


Cryogenic liquid hydrogen trailers can carry up to 5 000 kg of hydrogen and operate up to 12 bar. Hydrogen boil-off can occur during transport despite the super-insulated design of these tankers, potentially on the order of 0.5% per day. Hydrogen boil-off up to roughly 5% also occurs when unloading the liquid hydrogen on delivery.

The LH<sub>2</sub> trailers are insulated using a vacuum super insulation. This insulation is also used for transfer piping systems (Vacuum MLI Insulated Piping).<sup>1</sup>

The Vacuum Super Insulation is a system of thermal insulation which includes:

- A double-shell insulation space (inter-space) where static or dynamic (for large storage) high vacuum is limiting heat transfer by conduction and convection.
- A blanket of alternate layers of highly reflecting shields (Aluminium for instance) and insulating spacers (Lydall for instance) to prevent heat transfer by radiation as well as conduction between shields.
- An adsorbent (molecular sieve) placed in the vacuum space in order to achieve an adequate level of vacuum at low temperature by adsorption of residual gases and moisture.

According to Reddi *et al.* (2015), a LH<sub>2</sub> trailer is mass equivalent to 5 high capacity composite trailers and 15 classical metallic trailers.

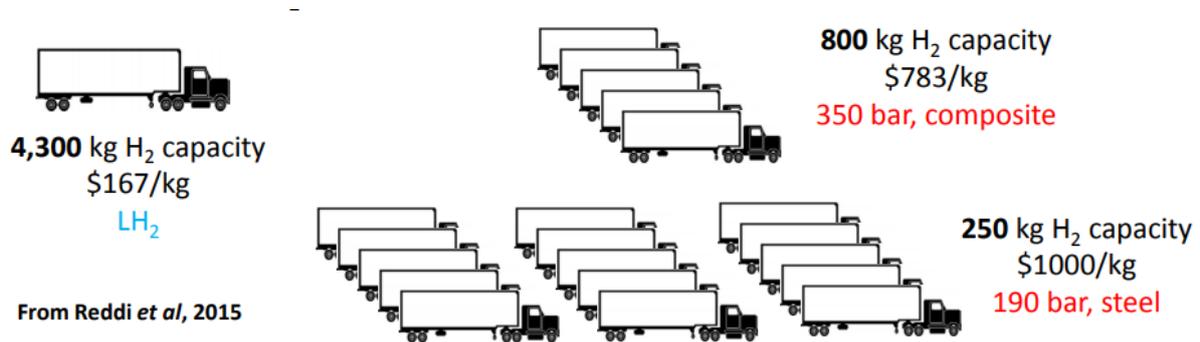

<sup>1</sup> Krishna Reddi, Marianne Mintz, Amgad Elgowainy, Erika Sutherland Building a hydrogen infrastructure in the United States August 2015 DOI: 10.1016/B978-1-78242-364-5.00013-0 In book: Compendium of Hydrogen Energy: Hydrogen Use, Safety and the Hydrogen Economy Chapter: 13 Publisher: Woodhead Publishing Editors: Michael Ball, Angelo Basile, T. Nejat Veziroglu



Figure 6: LH<sub>2</sub> trailers in Canada (up : Whistler / down : Becancour liquefier site).

For transferring LH<sub>2</sub> from a storage to another (for instance from a large storage to a truck or from a trailer to a storage at use site), there are two methods :

- pressure build up (natural pressure build up or voluntary vaporization of LH<sub>2</sub> via a small external heat exchanger). Hence, the pressure in the “mother storage” becomes more than the pressure in the “daughter storage” and LH<sub>2</sub> transfer is easy. The main drawbacks of this method are a long operating time and an increase of the pressure of the “mother” storage leading sometime to the need of a pressure venting;
- pumping in the “mother storage” using an appropriate transfer centrifugal cryogenic pump. The main drawbacks of this method are the cost of the pump and the need of frequent maintenance of the pump mostly due to cavitation (low available NPSH - Net Positive Suction Head: difference between liquid pressure and saturation vapour pressure of the considered compound - due to low density of LH<sub>2</sub>).

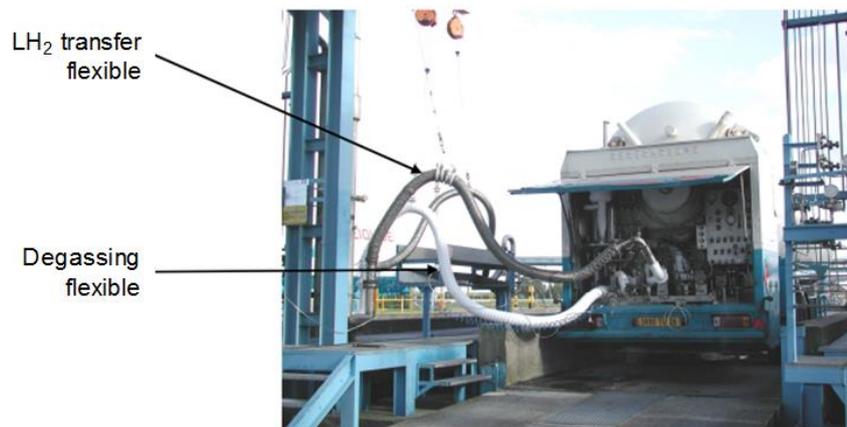



Figure 7: Photo of a LH<sub>2</sub> trailer during transfer.

#### 4. LH<sub>2</sub>-based fueling station

Basically a LH<sub>2</sub>-based fueling station consists in :

- a vertical or horizontal LH<sub>2</sub> tank. Tanks at the utilisation site are usually smaller with capacities from 100 to 2 500 kg for vertical tanks and up to 5 000 kg for horizontal tanks. Usually, the maximal operating pressure is 12 bar.
- an insulated process line from the bottom of the storage to the LH<sub>2</sub> pump (reciprocating or submerged) pumping LH<sub>2</sub> from the storage tank to the atmospheric vaporizer. This device allows to pump LH<sub>2</sub> up to 1000 bar.
- a heater (hot oil, electric or atmospheric heat exchange) in order to heat up hydrogen at 1000 bar .
- 1000 bar gaseous buffers (few m<sup>3</sup>). These buffers are generally bundles of type I or II metallic cylinders or long metallic tubes.
- all the other parts (dispenser, filling hose, ...) of the refueling station are similar to classical gaseous refueling station.

The LH<sub>2</sub> tank is delivered by a LH<sub>2</sub> truck. This LH<sub>2</sub> truck is composed of a 40 m<sup>3</sup> horizontal tank operating between 1 and 12 bar. The connection between the storage and the truck is done by a flexible transfer line. The transfer is performed without a pump. A small vaporizer is present on the trailer to produce a pressure build up in the truck tank and to allow the transfer of liquid H<sub>2</sub> in the stationary vertical storage.

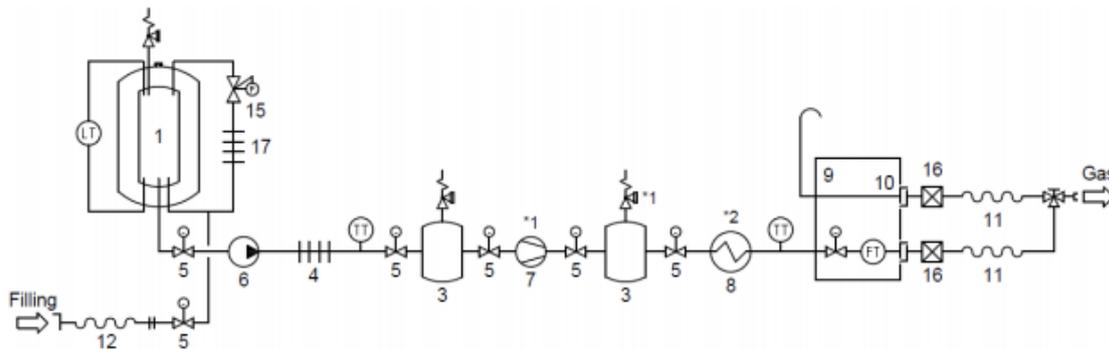

1. liquid hydrogen storage unit	8. chiller	15. pressure regulator
2. gaseous hydrogen storage unit	9. dispenser	16. breakaway coupling
3. intermediate gas storage	10. safety valve	17. pressure build-up evaporator
4. evaporator	11. delivery hose	
5. emergency shutdown system	12. off-loading hose	LT level sensor
6. pump	13. fill	FT flow sensor
7. compressor	14. purifier	TT temperature sensor

Figure 8: Process flow of a LH<sub>2</sub> based fueling station.

The station could be packaged as shown on the figure 9 below:



*Figure 9: View of a LH<sub>2</sub>-based fueling station (900 bar - 100 kg/d).*



*Figure 11: Photo of a LH<sub>2</sub> installation (Little Town - USA).*



*Figure 12: H<sub>2</sub> forklift fueling station (Coca Cola - Charlotte - USA).*

#### **4. Conclusions**

This report describes the liquid hydrogen installation for the whole logistic chain, from the liquefaction to the use in a fueling station.

One of the main challenges of the LH<sub>2</sub> infrastructure is risk and safety. Our knowledge of LH<sub>2</sub> accidental behavior needs to be improved to provide adapted regulation codes and standards context for the use of LH<sub>2</sub> in populated areas (cities). For instance, it is necessary to objectively assess the effect distances of accidental scenario without conservatism in order to suggest some separation distances between LH<sub>2</sub> objects and public domain (land planning).